


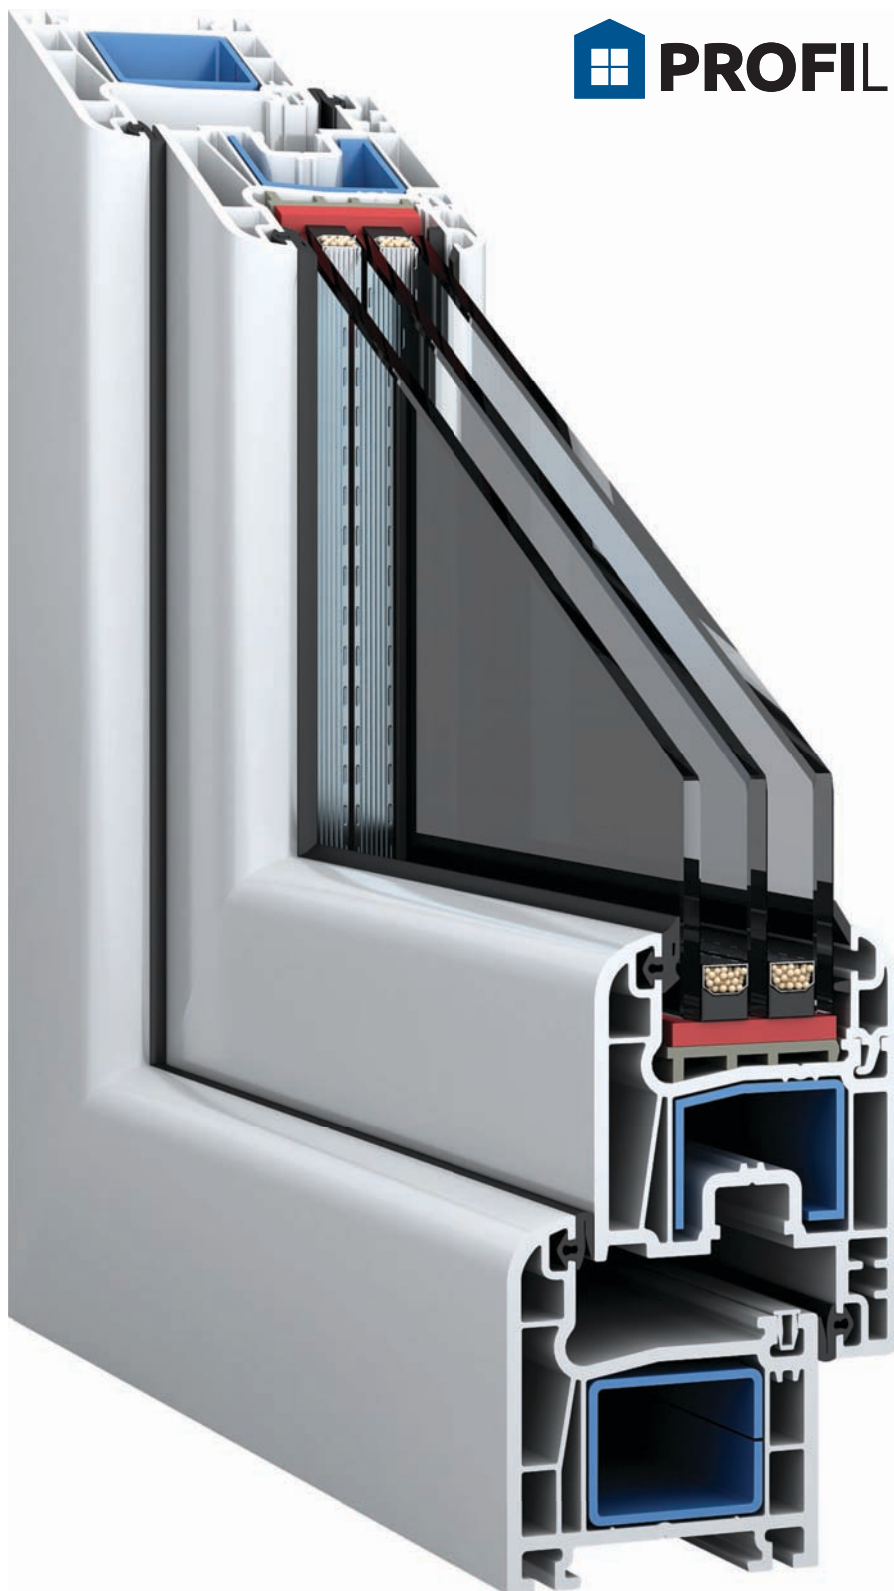

 **PROFILINK**

**Classic**



- Depth 60 mm
- 4 chambered sash
- 4 chambered frame
- Up to 30 mm isolation glass
- $U_f = 1.6 \text{ W/m}^2\text{K}$

- 60 mm Basis- Bautiefe
- 4-Kammer-Bauweise des Rahmens
- 4-Kammer-Bauweise des Flügels
- Glasdicke bis 30 mm möglich
- Dämmwerte von  $U_f = 1.6 \text{ W/m}^2\text{K}$

- Epaisseur 60 mm
- Ouvrant à 4 chambres
- Dormant à 4 chambres
- Vitrage d'isolation jusqu'à 30 mm
- $U_f = 1.6 \text{ W/m}^2\text{K}$

- Profundidad 60 mm
- Hoja de 4 cámaras
- Marco de 4 cámaras
- Vidrio de aislamiento hasta 30 mm
- $U_f = 1.6 \text{ W/m}^2\text{K}$

- Ширина 60 мм
- 4 камерная створка
- 4 камерная рама
- до 30 мм стеклопакет
- $U_f = 1.6 \text{ W/m}^2\text{K}$

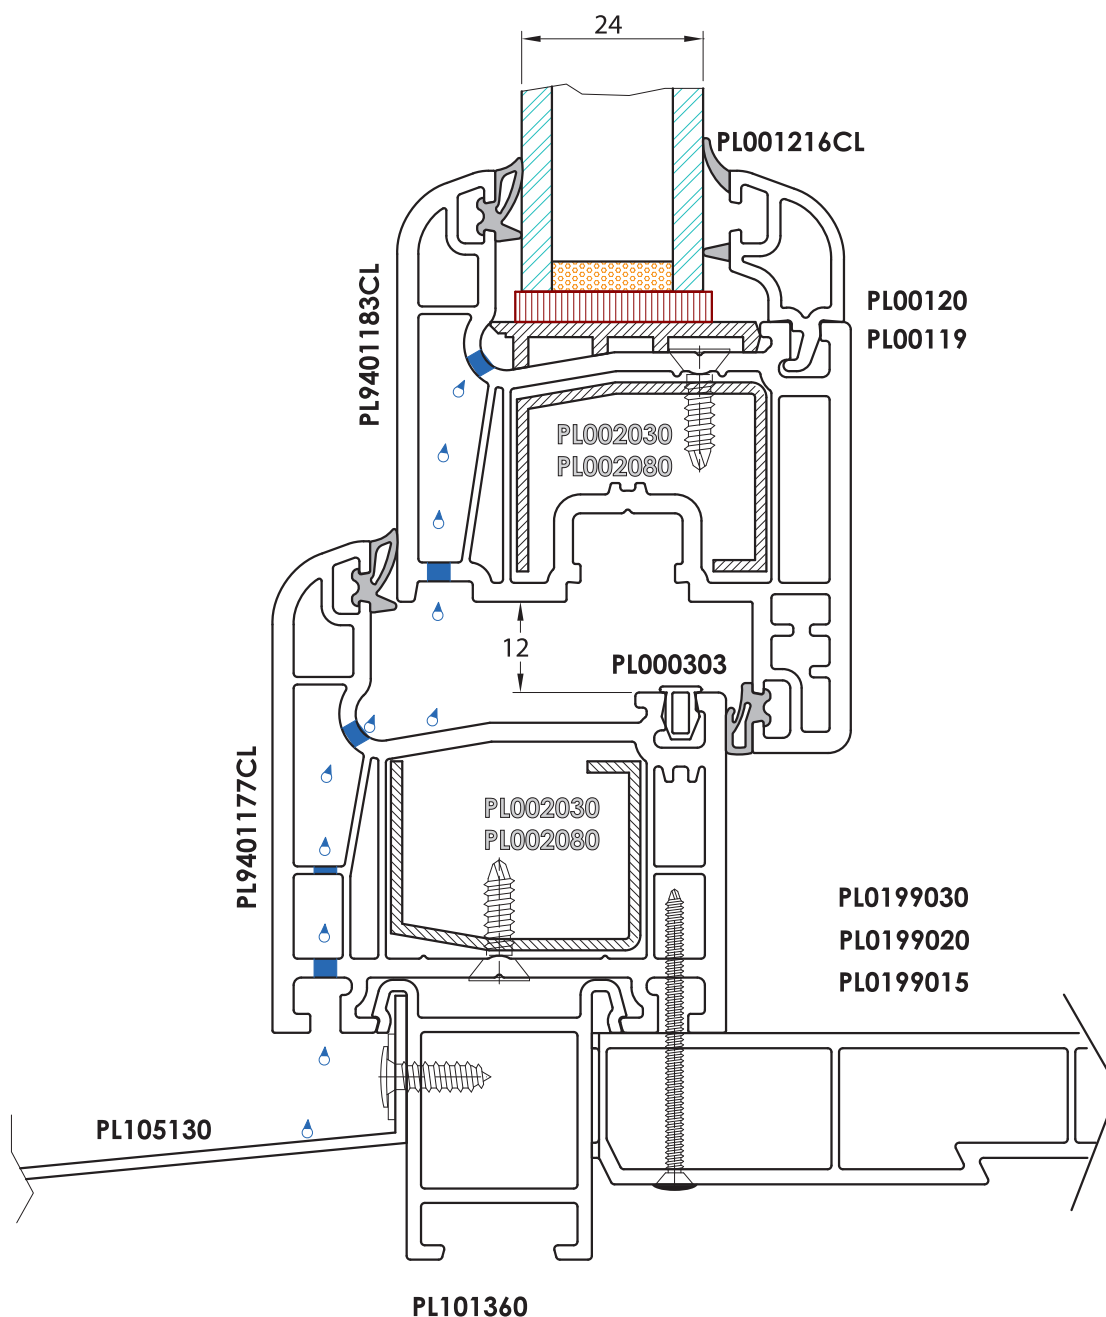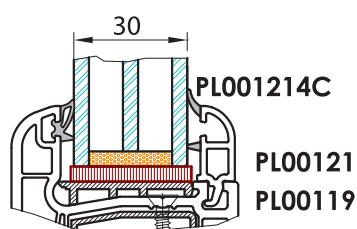

## Components:

- PL9401177CL - Frame
- PL9401183CL - Sash
- PL001216CL - Glassbead 15
- PL001214C - Glassbead 9
- PL101360 - Wall connector
- PL002030 - Steel reinforcement
- PL0199030 - Sill 300
- PL0199020 - Sill 200
- PL0199015 - Sill 150
- PL105130 - AL sill
- PL000303 - Decorative frame profile